

Standard inclusions, optional configurations, performance and other options

STANDARD INCLUSIONS

- · Quality European hardware
- All window hardware comes standard with locks
- Ultimate's custom designed flyscreens
- All windows are double glazed with standard Insulated Glass Units 24mm with argon gas fill
- All windows glazed on site by our expert tradesmen
- High performance dual seals
- Available in 70mm Zendow System
- Available in 80mm Legend System

PERFORMANCE

- 5 and 6 chambered systems for superior thermal performance
- All round steel reinforced for structural strength
- Windows have been tested to Australian Standard AS 2047.
- Windows can be manufactured to comply with AS 3959 up to and including BAL 40, product has been tested according to the requirements of AS 1530.8.1
- Standard glazed windows achieve acoustic performance of 34 Rw
- Windows achieve a Water Penetration Resistance of 200pa

OTHER OPTIONS

- Low E Insulated Glass Units can be supplied in place of clear
- Warm edge spacer
- Higher wind ratings than N3 can be achieved please specify if a higher rating is required.
- Tailored glass solutions to satisfy your needs, upgrades for safety, security, thermal performance, acoustic performance, privacy, aesthetics and comfort.

OPENING SIZE LIMITATIONS


- t-hand side. Maximum sash height 1800mm
 - Maximum sash width 1800mm
 - Minimum sash height and width 500mm

OPTIONAL CONFIGURATIONS

- Sashes can be on left- or right-hand side.
- Drawings shown are viewed from inside.Extra sashes can be inserted into configurations.
- Extra vertical section (Mullion) can be added to configurations.
- · Transoms and mullions can be added to configurations.
- Sizes can be outside of what is shown in this chart, this chart is a guide only.

.

FRAME SIZE GUIDE All windows are manufactured to your specified sizes.

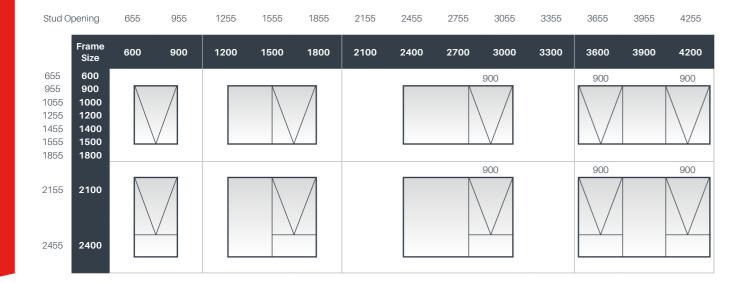

ACCESSORIES

Keyed handles available in:





OPTIONAL CONFIGURATIONS

