

TILT & TURN WINDOWS

DESIGNER RANGE



VIC Showrooms

- 📍 231 McKoy St
Wodonga
VIC 3690
- 📍 17 Scholar Dr
Bundoora
VIC 3083

Viewing by appointment only

ACT Showroom

- 📍 Unit 13 98 Sawmill Cct
Hume
ACT 2620

Contact Us

1800 167 349 (UW uPVC)
ultimatewindows.com.au



ultimatewindows.com.au



Standard inclusions, optional configurations, performance and other options

STANDARD INCLUSIONS

- Quality European hardware.
- Multipoint Locking.
- All window hardware comes standard with locks.
- Ultimate's custom designed flyscreens.
- All windows are double glazed with standard Insulated Glass Units 24mm with argon gas fill.
- All windows glazed on site by our expert tradesmen.
- High performance dual seals.
- Available in 70mm Zendow system.
- Available in 80mm Legend System.

PERFORMANCE

- 5 and 6 chambered systems for superior thermal performance.
- All round steel reinforced for structural strength.
- Windows shown have been tested to AS 2047 and rate to N3 wind rating.
- Windows can be manufactured to comply with AS 3959 up to and including BAL 40, product has been tested according to the requirements of AS 1530.8.1.
- Standard glazed windows achieve acoustic performance of 34 Rw.
- Windows have achieved a Water Penetration Resistance of 200pa.

OTHER OPTIONS

- Openings can be a tilt in only option, maximum sash size 2400mm high, 2400mm wide.
- Low E Insulated Glass Unit's can be supplied in place of clear.
- Warm edge spacer.
- Higher wind ratings than N3 can be achieved please specify if a higher rating is required.
- Tailored glass solutions to satisfy your needs, upgrades for safety, security, thermal performance, acoustic performance, privacy, aesthetics, comfort.

OPTIONAL CONFIGURATIONS

- Sashes can be on left or right hand side. Drawings shown are viewed from inside.
- Extra sashes can be inserted into configurations.
- Extra vertical section (Mullion) can be added to configurations.
- Transoms and mullions can be added to configurations.
- Sizes can be outside of what is shown in this chart, this chart is a guide only.

OPENING SIZE LIMITATIONS


- Maximum sash height 2400mm.
- Maximum sash width 1000mm.
- Maximum square meter of sashes 2.1 sqm.
- Minimum sash height and width 550mm.

FRAME SIZE GUIDE All windows are manufactured to your specified sizes.

Stud Opening	655	955	1255	1555	1855	2155	2455	2755	3055	3355	3655	3955	4255
Frame Size	600	900	1200	1500	1800	2100	2400	2700	3000	3300	3600	3900	4200
655	600												
955	900												
1055	1000												
1255	1200												
1455	1400												
1555	1500												
1855	1800												
2155	2100												
2455	2400												

ACCESSORIES

Keyed handles available in:

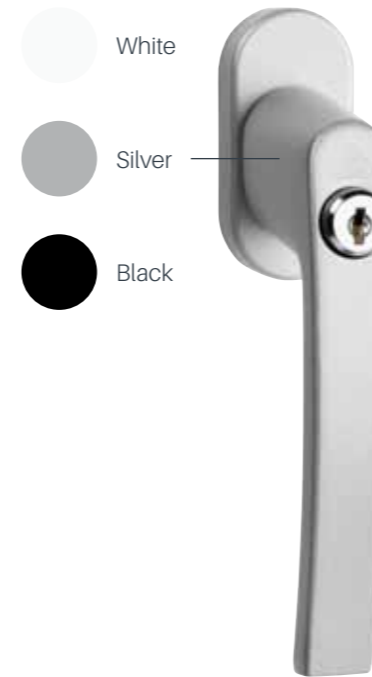

OPTIONAL CONFIGURATIONS

Openings can be a tilt in only option, maximum sash size 2400mm high, 2400mm wide.

